
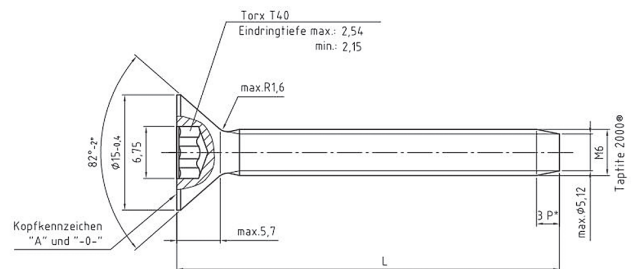


# Arnold Standard screw M6

## Fastening of HGV load floors

Ideal in situations where a bore of the same diameter is made through wood and steel frames.

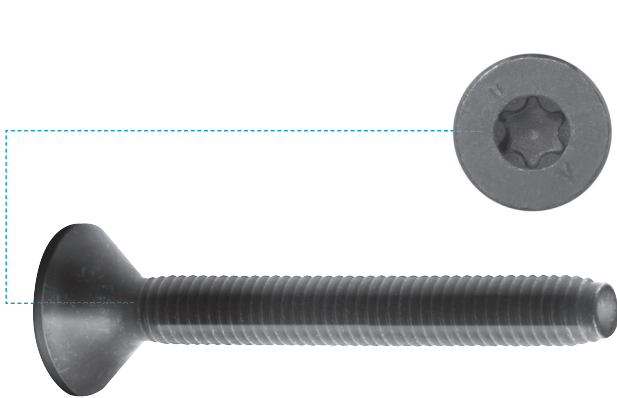

### Characteristics of screw

- ✓ **TAPTITE 2000<sup>®</sup>** thread
  - Easy to position
  - Low tapping torque
  - High vibration resistance
- ✓ Countersunk head: to fasten the wooden floor firmly to the frame
- ✓ T40 Torx drive: maximum bit service life
- ✓ Full thread
- ✓ High strength due to case hardened steel up to  $RM = 520 \text{ N/mm}^2$

### Features of finish

- ✓ **DELTA PROTECT KL100** surface:  
Maximum corrosion protection – 720 hour spray test
- ✓ **Delta Seal black GZ** coating:  
high quality visual appearance
- ✓ **GLEITMO 605** anti-friction coating:  
for improved tapping torque

Dimensions	Part No.
6 × 30	1.0070194.000.000
6 × 40	1.0070192.000.000
6 × 50	1.0070189.000.000

Dimensions	Part No.
6 × 60	1.0070188.000.000
6 × 70	1.0070183.000.000