
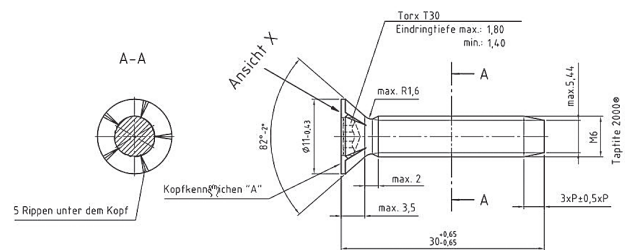


# Arnold Standard M6 with milled ribs

## Fastening of HGV load floors

Ideal in situations where a bore of the same diameter is made through wood and steel frames.

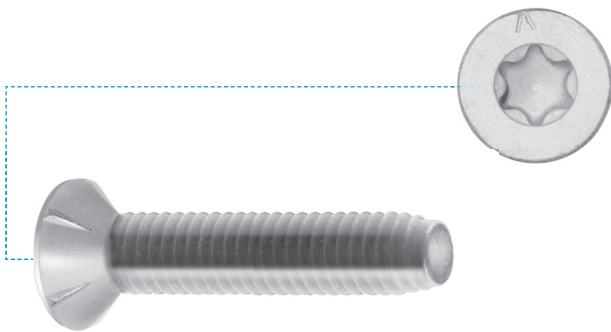

### Characteristics of screw

- ✓ **TAPTITE 2000**<sup>®</sup> thread
  - Easy to position
  - Low tapping torque
  - High vibration resistance
- ✓ Countersunk head with milled ribs.  
The milled heads below the head mill the screw head contour in the wood, thus providing optimum hold
- ✓ Torx T40 drive: maximum service life for the bit
- ✓ Full thread
- ✓ High strength Case hardening

### Features of finish

- ✓ **DELTA PROTECT KL100** surface:  
Maximum corrosion protection – 720 hour spray test
- ✓ **VH 301 GZ silver** coating:  
high-quality visual appearance
- ✓ **GLEITMO 605** anti-friction coating:  
for improved tapping torque

### Dimensions

6 × 30

### Part No.

1.0068880.000.001