
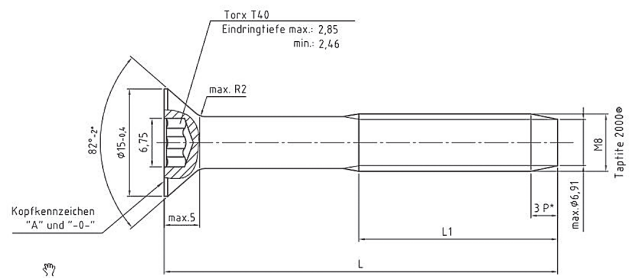


Arnold standard M8

Fastening of HGV load floors

Ideal in situations where a bore of the same diameter is made through wood and steel frames.

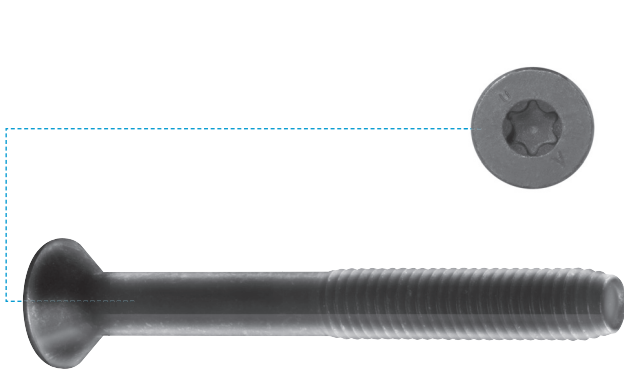

Characteristics of screw

- ✓ **TAPTITE 2000[®]** thread
 - Easy to position
 - Low tapping torque
 - High vibration resistance
- ✓ Countersunk head: to fasten the wooden floor firmly to the frame
- ✓ Torx T40 drive: maximum service life for the bit
- ✓ Partial thread: used as depth control when screwed in
- ✓ High strength due to case hardening, for steel up to $RM = 520 \text{ N/mm}^2$

Features of finish

- ✓ **DELTA PROTECT KL100** surface: Maximum corrosion protection – 720 hour spray test
- ✓ **Delta Seal black GZ** coating: high quality visual appearance
- ✓ **GLEITMO 605** anti-friction coating: for improved tapping torque

Dimensions	Part No.
8 × 40	1.0070201.000.000
8 × 55	1.0070200.000.000

Dimensions	Part No.
8 × 70	1.0070198.000.000