

Flowweld[®]

Excellent fastening performance for difficult combinations of materials

- + Innovative fastener design
- + High-strength fastening in tensile shearing and cross tension
- + No upstream processes
- + Joining lightweight materials to high-strength metals
- + Fully automated and reliable system technology



12 kN

Shearing strength

Fastenings made with elements consisting of with shearing strength of up to 12.0 kN and cross tension up to 8.0 kN.

Flowweld® withstands very high mechanical loads. When combined with structural adhesives performance is enhanced even further.



The Flowweld® effect

High shearing and cross tension strength

➤ Flowweld® creates a sufficiently large firmly bonded fastening area between the friction element and the base plate. A form-fit is produced between the head of the friction element and the covering material.

Joins lightweight materials to high-strength metals

➤ Friction element welding makes it possible to join new combinations of materials which cannot be joined using conventional methods.

No upstream processes

➤ No predrilling or cleaning at the joint position. Flowweld® requires no preparatory work steps.

Fully automated and reliable system technology

➤ User-friendly software controls the tool with its own feeder unit to join the friction element.

Flowweld[®] joins lightweight metals to high-strength steel





Friction element welding
supplies excellent fastening
performance in difficult
combinations of materials.



Friction element welding: The joining technique for extreme situations

Flowweld[®] – friction element welding from ARNOLD UMFORMTECHNIK starts where conventional joining processes used in the manufacture of vehicle bodies reach their limits. The joining process is distinctive for its fastening performance in difficult combinations of materials. The comprehensive system joins the fastening element securely and economically.

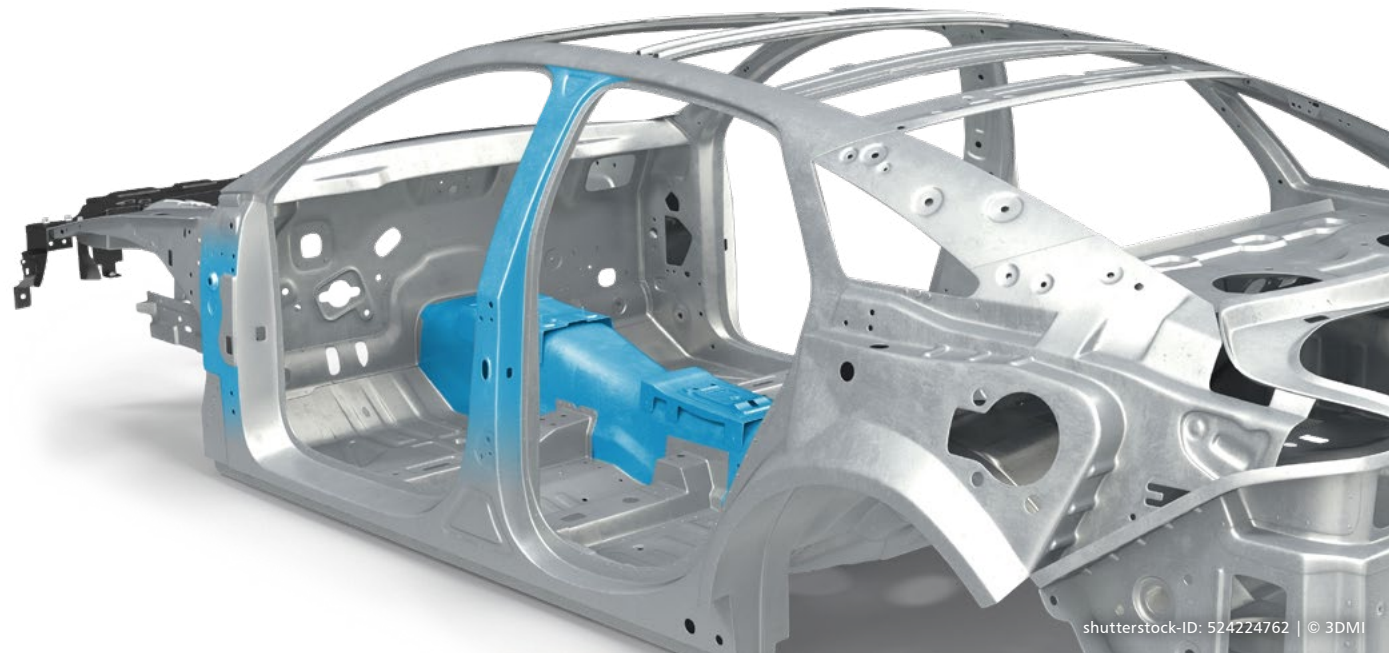

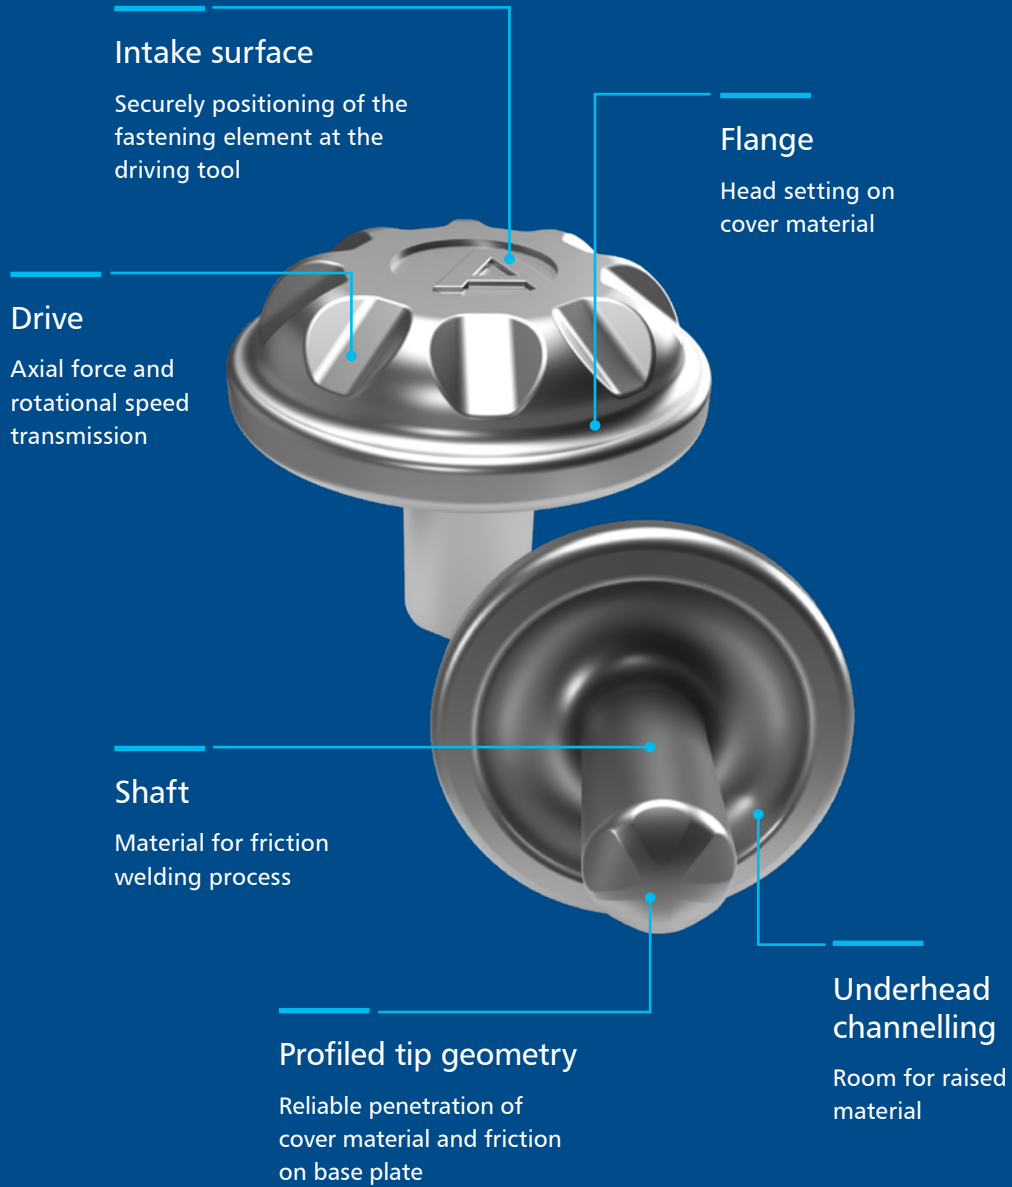

Technical Data

Material	1.5525 20MnB4
Strength class	10
Shaft diameter	3.5 mm
Shaft length	5.0 mm / 7.0 mm
Coating	Zink-Nickel
Weight	2.2 g
Head height	3.5 mm
Head diameter	11.9 mm

Technical benefits and unique features of Flowweld®



Flowweld®

Top Features

- ⊕ Base plate thicknesses start at 0.8mm and strength classes up to 1900 MPa
- ⊕ Cover material thicknesses available from 0.8 to 3.00mm with just two lengths of fastener element
- ⊕ System technology designed especially for friction element welding
- ⊕ Joining direction aluminum to steel
- ⊕ Hybrid material combinations can be achieved with adhesive
- ⊕ Achievable flange widths, min 17.0mm
- ⊕ Shearing strengths up to 12.0 kN
- ⊕ Cross tension strengths up to 8.0 kN

Reliable, high-quality joining process



*More about
the system
technology on
pages 15 and 16*

System technology designed especially for friction element welding

We developed our own system to bring the art of friction welding to perfection. The system is adapted to the geometry of the element to ensure a fast, reliable joint.

Fastening the Future of Mobility

A-pillar below


The aluminum outer skin is fastened to the A-pillar. The high-strength steel component remains rigid in a crash, so is important for passenger safety.

Middle tunnel

The middle tunnel connects the rear end to the front of the body. The combination of materials and the way it is shaped ensure that the underbody is rigid.

B-pillar

The B-pillar has the same characteristics as the A-column. The reduction in flange widths ensures a wide entry area.

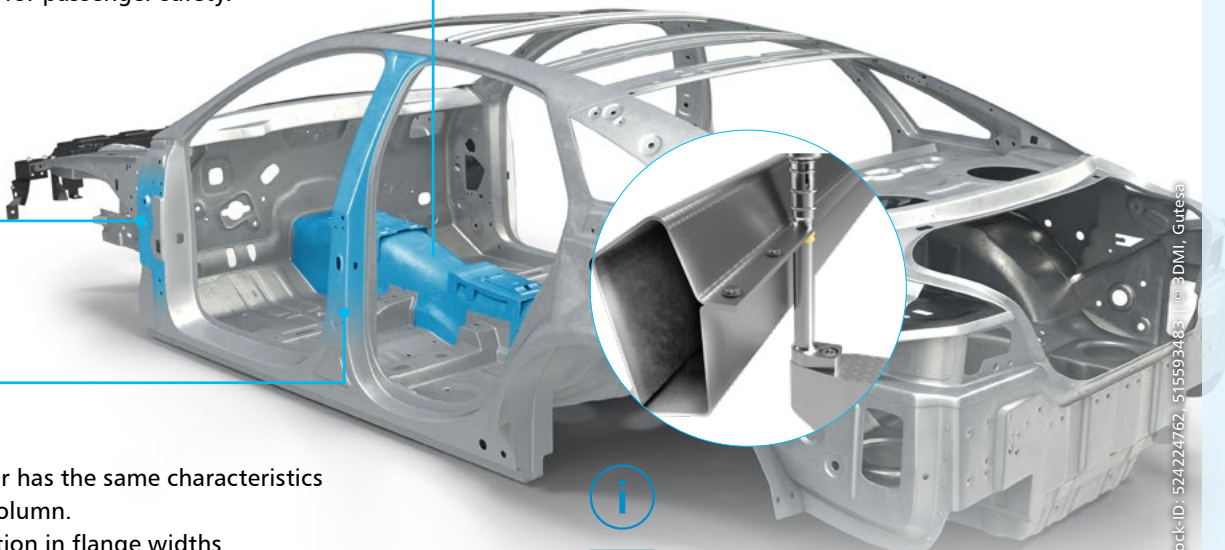

The applications shown here are examples. In principle, the process can be used for any combination of aluminum and high-strength steel, with access from both sides.

Areas of application

The materials

- ⊕ Lightweight materials for the cover material
- ⊕ High strength steel for the base plate

Dimensions

Flowweld® can join minimal flange widths of 17.0 mm. Depending on the application the point-to-point distance can be selected individually.

Performance

The strength of the fastening depends on the material combination used.

Flowweld® provides better passenger protection.



For application guidelines see pages 11 and 12.




Flowweld®

How it works in four steps



01 | Positioning

Press the components together, provide the fastening element



02 | Penetration

Penetrate and displace the cover material



03 | Friction

Remove base plate coating, warm the joint zone



04 | Compression


Compress the fastening element

Easy configuration for difficult fastenings.

Parameters of Flowweld® process

Different settings are made for each of the four steps of the process. First, control variables, necessary to make the joint, target variables to define the end status of each step, and monitoring variables to check the joining process.

An overview of the process progression

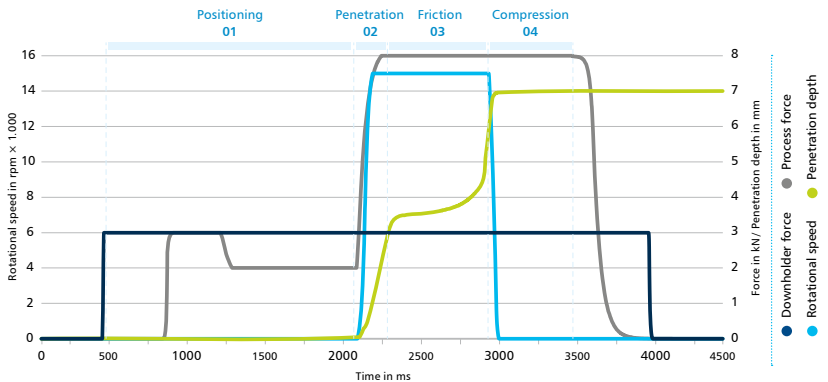



Settings for the Flowweld® process

The control variables governing the downholder force, process force and rotational speed are configured for all four process steps. The penetration depth of the fastening element can be adapted individually to the material, to act as the target and monitoring variables.



The values shown are by way of example. The actual values required must be investigated on the original component. The System Testing Centre offers support here. A joint investigation and series production examination will define the settings.

Temperature and heat affected zones

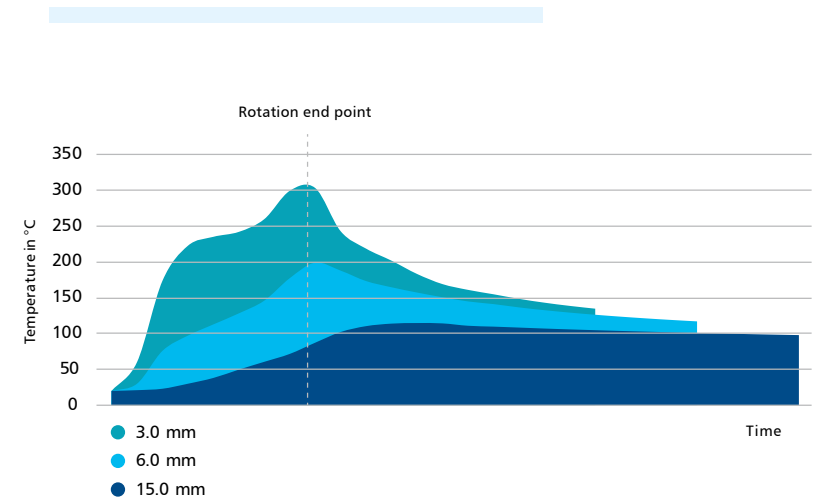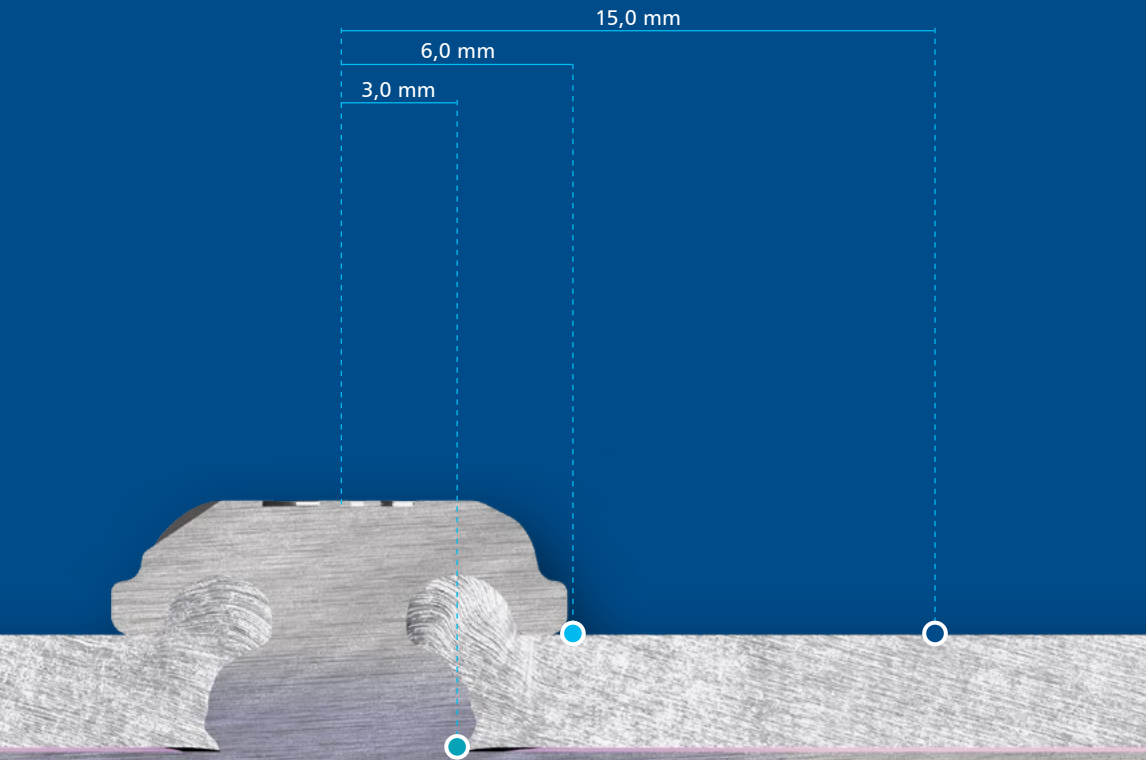

Flowweld® temperature progression

The temperature in the joint zone rises sharply as the rotation to pierce the cover material begins. After a stop point, the temperature is at its maximum, as the element becomes shorter through friction. At that point rotation stops. The cooling phase then follows.



The image shows an example of the temperature progression during the joining process using EN AW-5754 3.00 mm cover material and a 1.5 mm 22MnB5 base plate.

Friction element welding compared with other mixed construction techniques

Flowweld® Benefits


- ⊕ Can be used on very high-strength steels
 - ⊕ No preparation required
 - ⊕ No base plate separation
 - ⊕ Joins thick base plates
 - ⊕ Easy to apply sealant for corrosion protection
- ⊕ Uniform tool technology for various thicknesses of material combinations
 - ⊕ Testing concept in line with production techniques
 - ⊕ High tolerance against component thickness variations

Comparison with self-piercing rivets

Unlike self-piercing rivets, Flowweld® can also create good quality mixed material fastenings with cast aluminum materials that are susceptible to cracking. As for steels, these can be thick high-strength steels. Moreover, the fastenings will be stronger. Finally, the process is very economical with adhesive because very little becomes displaced during the joining process.

Combinability with adhesives

Continuous bonding possible

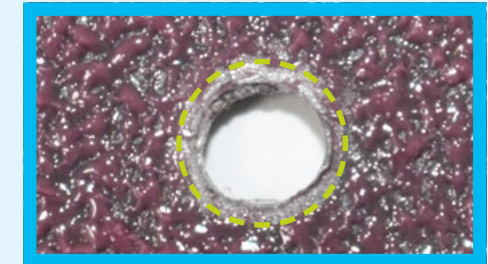



Small displacement area

No negative effects on the bonding surface




Friction element variants

A matter of size

Shaft length 5.0 mm

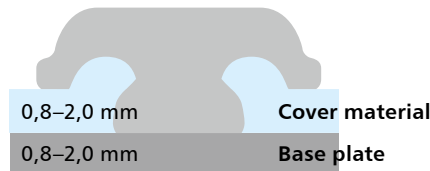

Shaft length 7.0 mm

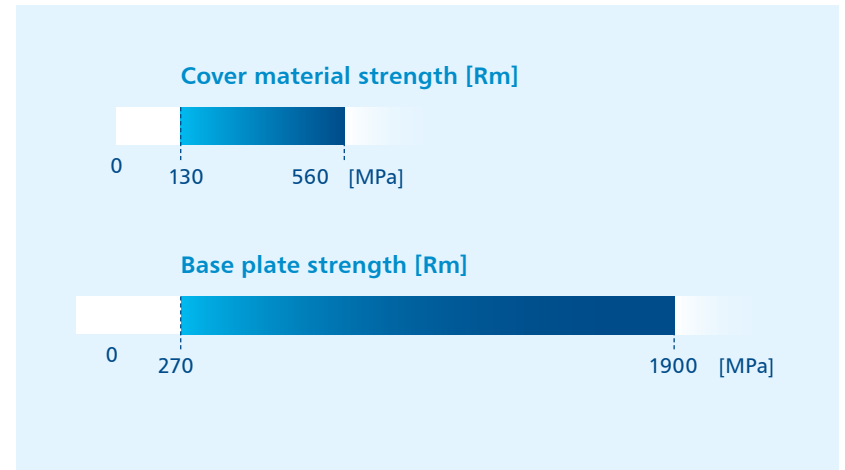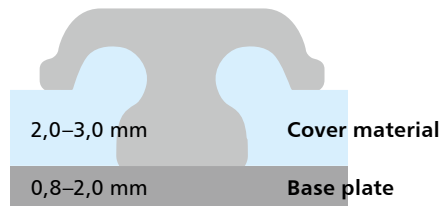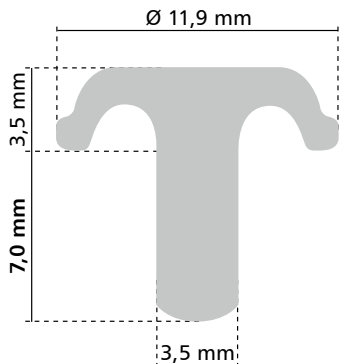


The right element for each application

To achieve a good friction welding fastening it is crucial to choose the right element.

That choice will depend on the thickness of the cover material. To ensure that the head setting is secure, the volume of under-head channelling on the fastening elements is adapted to the material displaced.



Dimension and performance of fastening

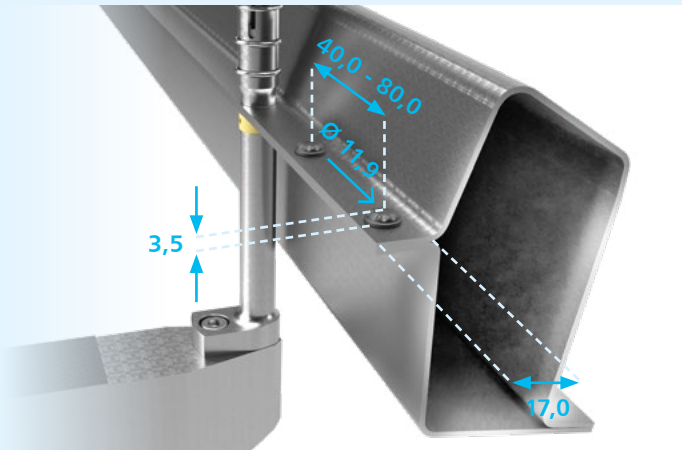



Geometry of the application

The geometry of the element head remains as the interference contour on the plate. The friction elements can be joined on flange widths from 17.00 mm. Use 40.0 to 80.0 mm as a guideline for joining point distance. This is defined by whether adhesive is to be used, as well as the component's required fastening strength.

Shearing strength load DIN EN ISO 14273

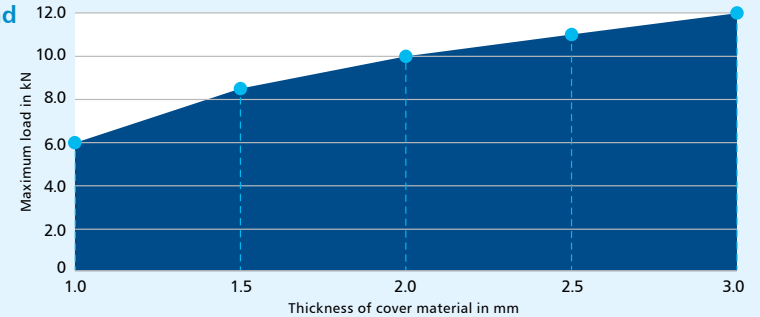

Cross-tension load DIN EN ISO 14272

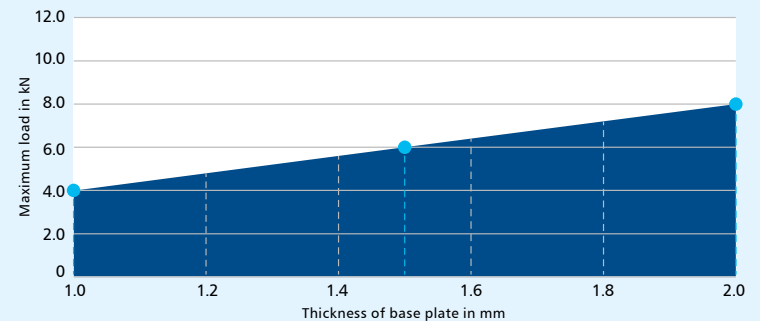


Lightweight structures are the future and Flowweld® is what connects them

The Flowweld®
System offers new
opportunities for
vehicle body design.

40%

That is the **proportion that the body adds to the overall weight** of a car. The car body plays a key role in moving vehicle production towards lightweight engineering.

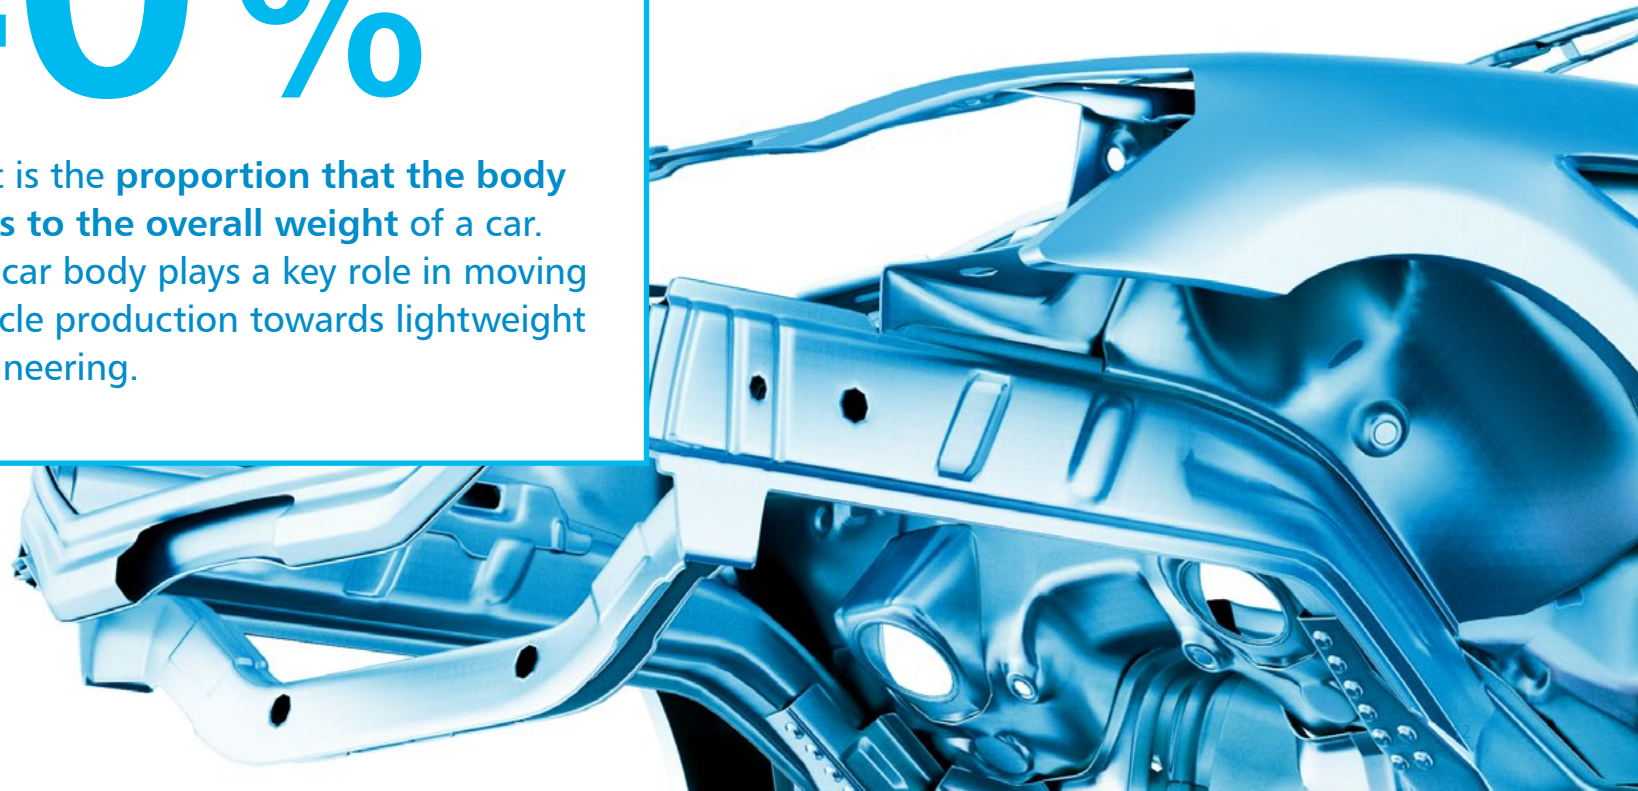



If the joining point is accessible any lightweight material can be joined to steel.

Flowweld® joins lightweight metal components to high strength steel components. There are no limits to the steel component's strength classification. All that is needed is that the steel material can be welded. The limiting variable on the procedure is accessibility

of the joining point.

If it is accessible, then any lightweight metal to steel fastenings can be made. Due to its higher specific tensile strength the use of high-strength steel is desirable.

Using less material the material combination achieves the same or even better mechanical properties.

High energy efficiency by reducing weight

For the automotive sector, energy efficiency is of extreme importance. Efficiency increases as drive technology, traction resistance and overall weight are optimised. The car body represents a major proportion of the overall weight. So saving weight is very important here. By reducing weight, combustion engine vehicles require less energy and this results in lower CO₂ emissions. And electric cars see an improvement in range per battery charge.

- ⊕ Lightweight increases energy efficiency
- ⊕ High strength hot-formed sheets
- ⊕ Material pairings: any light metal-to-steel fastening can be made.
- ⊕ Hybrid joins possible
- ⊕ Outstanding mechanical properties using less material

Flowweld® the system technology

XPegasus assembly program

User-friendly configuration

The control system is developed and manufactured by Harms & Wende, specialists in welding control systems, based in Hamburg. Their XPegasus operating software is tailored especially to what Flowweld® needs. Harms & Wende has decades of experience of networked welding control and friction welding. The Genius welding control system that is widely used in the automotive sector is the basis on which the modular Flowweld® System is built. All the parameters for the processes, elements, and monitoring variables are configured in the software.



Joining tool

High parameter variations

The joining unit joins the fastener element. The hold-downholder force to press the components together, along with the rotational speed and process force for the joining process are produced by rotary and translatory drives. Different counter-holder lengths can be selected to ensure accessibility depending on the application. The C-frame is designed to be very rigid to prevent bending.

Max down-
holder force
4.0 kN

Max rotati-
onal speed
25,000 rpm

Max process
force 10.0 kN





Robot-assisted application

Ready-to-fit control cabinet technology

The control cabinet contains the communication system between the system technology and the robot. Various interfaces can be selected for data exchange.

Fastener element feeder

Feed unit protects the parts

The feeder has a hopper to supply the fastener elements.

The fastener elements are sorted into layers on a catch plate inside the drum and once separated are fed the joining unit by compressed air.



You can select a different hose length to minimise feed times.

The ARNOLD GROUP

Wherever customers need us.

ARNOLD – this name is internationally renowned for efficient and sustainable fastening systems at the highest level.

With a foundation of many years of expertise in the production of intelligent fastening systems and very complex extruded parts, the ARNOLD GROUP has developed over a number of years into a comprehensive supplier and development partner for complex fastening systems. With our positioning of "BlueFastening Systems", this

development process will continue under a united and harmonised structure. Engineering, services, fasteners and functional parts, together with feeding and processing systems, all from a single source – efficient, sustainable and international.

www.arnold-fastening.com

ARNOLD UMFORMTECHNIK GmbH & Co. KG

Carl-Arnold-Straße 25
74670 Forchtenberg-Ernsbach
Germany
T +49 7947 821-0
F +49 7947 821-111



ARNOLD UMFORMTECHNIK GmbH & Co. KG

Im Weitblick 1
74670 Forchtenberg-Rauhbusch
Germany
T +49 7947 821-0
F +49 7947 821-111



ARNOLD UMFORMTECHNIK GmbH & Co. KG

Max-Planck-Straße 19
74677 Dörzbach
Germany
T +49 7947 821-0
F +49 7947 821-111



ARNOLD UMFORMTECHNIK GmbH & Co. KG

Logistics center
Dörzbach plant
Germany
T +49 7947 821-0
F +49 7947 821-111



ARNOLD FASTENING SYSTEMS Inc.

1873 Rochester Industrial Ct.
Rochester Hills, MI 48309-3336
USA
T +1 248 997-2000
F +1 248 475-9470



ARNOLD FASTENERS (SHENYANG) Co., Ltd.

No. 119-2 Jianshe Road
110122 Shenyang
China
T +86 24887 90633
F +86 24887 90999



ARNOLD TECHNIQUE FRANCE SAS

267 Route Nationale 7
38150 Salaise sur Sanne
France
T +33 (0)427 698177
F +33 (0)427 698178

